



Quick Start Guide - ZBRE Model #5010S ZigBee HA Range Extender



Product Brief

The ZBRE provides the means to easily extend the range of your ZigBee[®] Home Automation (HA) devices as well as increase the strength of your ZigBee wireless network.

The built-in high power ZigBee HA certified radio joins the HA network as a ZigBee Pro router and then facilitates the joining of devices that may not be within range of the ZigBee HA network. Use of the ZigBee HA Profile ensures compatibility with the emerging standards for smart homes/buildings being deployed around the world.

Installation


The ZBRE must be installed indoors or in a weather proof enclosure

Reset to Factory Defaults

- Press and hold the Program Button while plugging the ZBRE into a 120V* AC receptacle and release after 1-2 seconds.
- The Status LED will blink rapidly indicating the ZBRE has been reset and is searching for an open HA network to join.

(*240VAC input is acceptable, but the unit is equipped for North American receptacles)

Note: Pass-through outlet not to exceed 15 Amps.

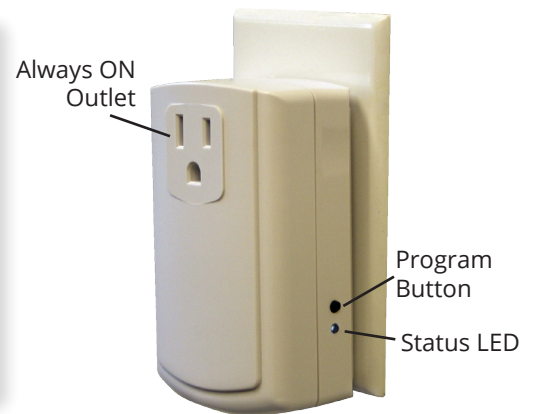

Set-up

Join Network

- Open a ZigBee HA router or HA network coordinator to permit joining of your ZBRE to the network.
- When the ZBRE has joined the network, the Status LED will stop flashing. If the Status LED remains flashing, the device is unable to join the network.

Open Permit Join

In addition to extending the range of ZigBee HA devices, the ZBRE also serves as a router and allows other ZigBee HA devices to join the network. After the ZBRE has already joined the network (LED is solid *green*), proceed as follows:

1. Press and hold the Program Button for 6 seconds. The Status LED will begin to flash rapidly. The ZBRE will allow joining of other devices for up to 4 minutes.
2. Join the new ZigBee HA device to the network according to the join method of that device.
3. When the ZBRE has timed out for join permission, the Status LED will return to solid green.

Program Button Additional Operation		
Desired Operation	Action on Pushbutton	Device Behavior
Leave Network	Press and hold for 15 seconds	Status LED will begin Fast Flashing
Close Join	Press and hold for 3 seconds when device is in Open Join	Status LED will stop flashing
Request New Firm-ware via OTA	Tap 6 times	LED will quick blip off, once every second while OTA update is in progress
Soft Reset	Tap 10 times	LED will go out for about a second and then device will rejoin network

Status LED Indication	
Pattern	Indication
Fastest flashing	Joining/Rejoining network
Flash once per second	Permit-Join mode
Solid	Joined to network
Two blips per second	Device cannot find "Parent Device" and/or network it was joined to